

PRODUCT SPECIFICATION  
**PS-11-XXX-76E-ABNOOF**

**1.0 SCOPE**

This document establishes the specification requirements for a distribution indoor/outdoor, singlemode OS2 fiberoptic cable. This cable construction consists of singlemode fibers in a distribution tight-buffered design with a riser rated PVC jacket.


**2.0 APPLICABLE DOCUMENTS**

Reference Documents: TIA/EIA FOTP Standards 455  
Color Coding of Fiber Optic Cables TIA/EIA-598  
UL 1666  
GR-409-CORE

**3.0 REQUIREMENTS**

This document contains test values for all-important mechanical, optical, and environmental parameters and as such, is the basis for all-incoming inspection and acceptance.

**4.0 CABLE CROSS SECTION**

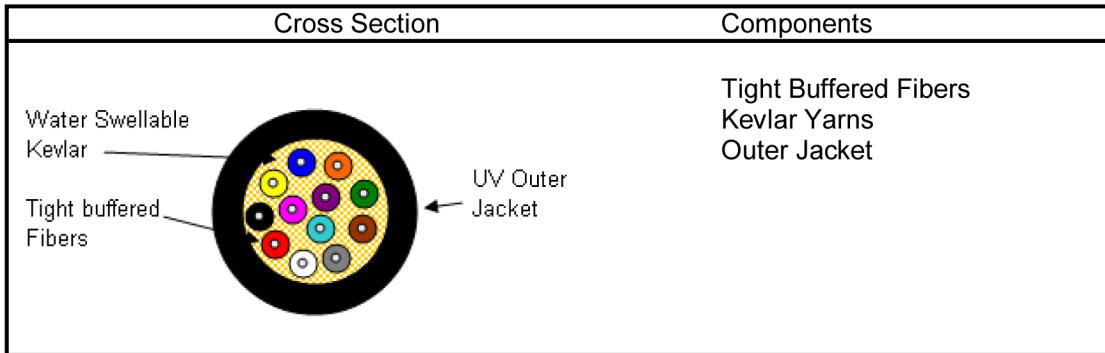

**5.0 OVERALL CABLE CONSTRUCTION**

**5.1 Tight Buffered Fiber**

Dimension: 900µm, nominal.

Tight buffered fiber color code: 1-blue, 2-orange, 3-green, 4-brown, 5-slate, 6-white, 7-red, 8-black, 9-yellow, 10-violet, 11-rose, and 12-aqua.

**5.2 Cable strength**

Aramid yarns with water swellable characteristics are pulled in with the tight-buffered fibers under the outer jacket.

**5.3 Outer Sheath**

Pressure extruded black UV resistant riser rated PVC jacket (or color per customer request)

**5.4 Cable Markings**

REMFO 11 SERIES, FIBER OPTIC CABLE, XX (No. of fibers)-SM, REMEE PRODUCTS CORP., MM/YY (month & year of manufacture), OFNR C(ETL)US, Sequentially meter marked.

Special print as required by customer.

## 5.5 Nominal Cable Dimensions & Weights

Remee Products Part Number	No. of Fibers	Cable OD (mm)	Cable OD (in.)	Weight KG/KM	Weight LB/1000ft
11-002-76E-ABNOOF	2	4.6	.180	19	13
11-004-76E-ABNOOF	4	5.0	.195	22	15
11-006-76E-ABNOOF	6	5.3	.210	27	18
11-008-76E-ABNOOF	8	5.7	.225	31	21
11-012-76E-ABNOOF	12	6.6	.260	40	27

## 6.0 FIBER CHARACTERISTICS

### 6.1 Physical Parameters (nominal)

Fiber Type	Single mode*
Maximum Attenuation @ 1310/1550nm**	0.40/0.30 dB/km
Cladding Diameter	125.0 ± 0.7 µm
Maximum Core/Clad Concentricity Error	0.5 µm
Maximum Cladding Non-circularity	0.7%
Primary Coating Diameter	245 ± 7 µm
Cabled Cutoff Wavelength	<1260nm
Mode Field Diameter	9.0 ± 0.4µm @1310nm 10.1 ± 0.5µm @1550nm
Temperature Dependence	≤0.05dB/km (-60°C to 85°C)
Zero Dispersion Slope	0.090ps/nm <sup>2</sup> -km
Maximum PMD Link Design Value	0.06ps/√km
Group Refractive Index @ 1310/1550	1.467 / 1.468
Proof Test	100 kpsi

\*According to ITU G.652.d

\*\*Measured attenuations on shipping reels will not exceed the nominal values by .75dB/km.

## 7.0 MECHANICAL & ENVIRONMENTAL PERFORMANCE

Maximum Tensile Load for:

Installation: 2&4-fiber 1405N/315lbf, 6&8-fiber 1610N/362lbf  
12-fiber 2700N/600lbf

Long Term: 2&4-fiber 455N/102lbf, 6&8-fiber 535N/120lbf  
12-fiber 600N/135lbf

Minimum bending radius:

Loaded: 20 x diameter  
Unloaded: 10 x diameter

Impact Resistance: 25 Impacts (min.)  
Flexing, ±90°: 25 Cycles (min.)

Temperature rating:

Operation, -40°C to +85°C  
Installation, 0°C to +75°C  
Storage, -55°C to +85°C  
Crush Resistance: 100N/cm

## 8.0 PREPARATION FOR DELIVERY

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available.



DISTRIBUTED BY:  
Cables Plus, LLC  
5608 West Marshall Street, Richmond, VA 23230  
Toll Free: (866) 678-5852 | Fax: (804) 716-9040  
www.cablesplususa.com