


1.75 ± 0.15  
PANEL THICKNESS

SEE NOTE 1

**RECOMMENDED MOUNTING CUTOUT**

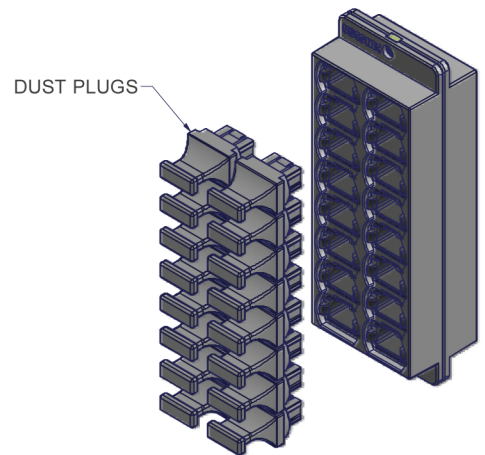

PART	MATERIAL
ADAPTER HOUSING	THERMOPLASTIC
INNER ADAPTERS	POLYETHERIMIDE
ASSY. SCREWS	STAINLESS STEEL
M3 NUTS	STAINLESS STEEL
DUST PLUGS	POLYCARBONATE

**NOTES:**


1. FOR SCREW MOUNT APPLICATIONS, USE OF M3 SCREWS (NOT PROVIDED) TORQUED AT 2in-lbf RECOMMENDED.
2. HOUSING COLOR: BLACK
3. TIA-604-5 KEYING OPTION 1 (OPPOSED)
4. SHIPS WITH 16 DUST PLUGS INSTALLED IN ONE SIDE.

▲ DENOTES CRITICAL DIMENSION

REV	DATE	DESCRIPTION	ECN
A	5/26/10	INITIAL RELEASE	01239
B	9/3/10	CHANGE COLOR TO BLACK; ADD SCREWS	01239
C	2/3/11	ADD NOTES 3 & 4; ADD MATERIALS TABLE	01239
	4/7/11	INITIAL RELEASE	01239

**CUSTOMER DRAWING**

DIMENSIONS FOR REFERENCE ONLY



**METRIC/mm**

TITLE <b>ADAPTER, 2 x 8, MTP®</b>	
SIZE <b>B</b>	S&M Part No.: 12698
DWG NO. <b>C12698</b>	REV C
SCALE N.T.S.	Drafter B. HENLEY
Date: 11/5/2009	SHEET 1 OF 1