

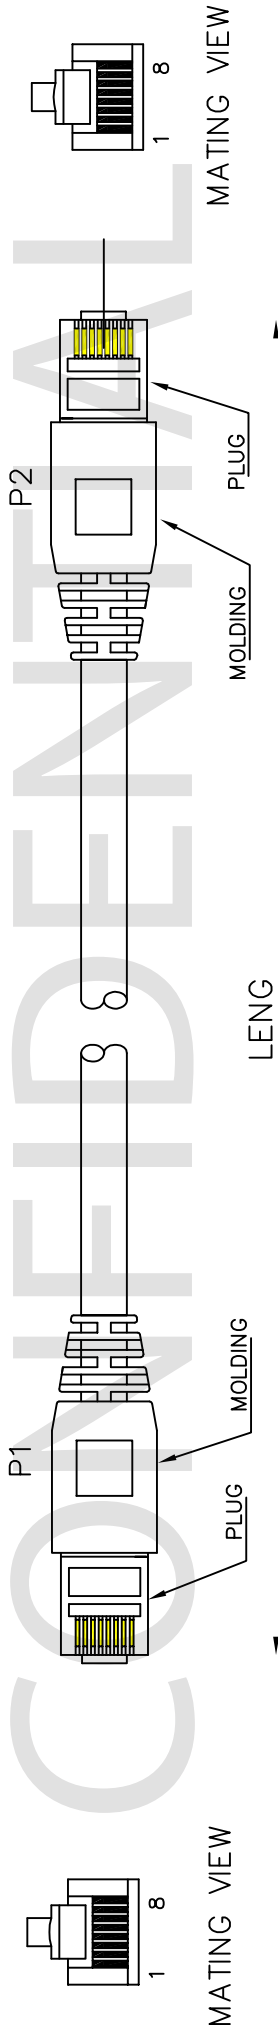


DATE	REV	DESCRIPTION	BY	CHKD




Marking: <LP556> YFC CAT6A UTP 10 GIGABIT ETHERNETPATCH CABLE ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 & IEC 332.1 24AWGX4P TYPE CM (UL) C(UL) CMH E164469-F3

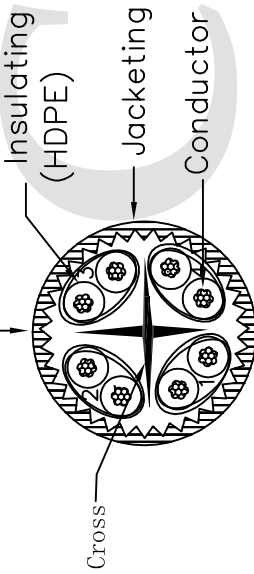


Conductor	Bare Copper 24AWG 7/0.196±0.015mm
Insulation	Thickness:MIN at any point:0.20mm MAX AVG:0.25mm Diameter:1.05±0.05mm
Jacketing	PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:7.0±0.15mm

orange	2	green	3
white	/orange	white	/green
blue	1	brown	4
white	/blue	white	/brown

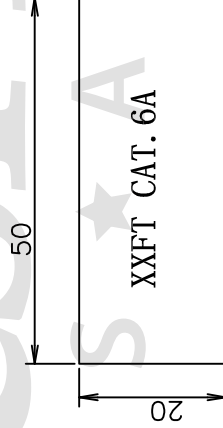

LABEL

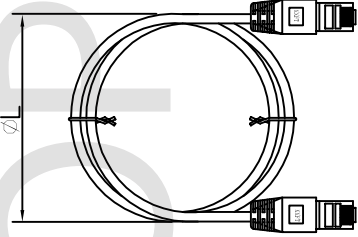

WIRE	CAT. 6A UTP STR 24AWG*4P
PLUG	YU-02
LENGTH	XXFT
WIRE COLOR	XX
Gold plating	50U"

PA/R	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
2	2	ORG	2
3	3	WHT/GRN	3
4	4	GRN	6
5	5	BLU	4
6	6	WHT/BLU	5
7	7	WHT/BRN	7
8	8	BRN	8

U S S A

Cables Plus, LLC  
5608 W Marshall St, Richmond, VA 23230 - (804) 716-9007  
www.CablesPlusUSA.com

DRAW_NO	YU-02	ITEM	CAT. 6A UTP STR 24AWG*4P
DEPARTMENT		DRAW	DATE 2007/12/14
SCALE		CHECKER	DATE
UNIT	MM	APPROVAL	DATE

Unless specified on the drawing, tolerances are per the follows:

.X ± 1  
.XX ± 0.2  
.XX ± 0.05

3RD