


ClearCurve OM3[®] Ribbon



Description

The Light Connection's ribbon is composed of 2-12 optical fibers ribbonized with an acetate coating. All component materials meet the EU RoHS and REACH Directive standards.

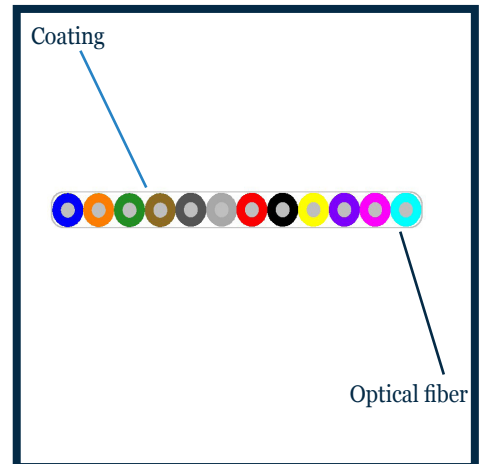

SPECIFICATIONS

Temperature Range

Storage Temperature	-60 C to +85 C
Operating Temperature	-60 C to +85 C

Cable Characteristics

<i>Mechanical</i>		<i>Optical</i>	
Fiber Count	12	Fiber Type	ClearCurve [®] OM3
Strength Member	N/A	Core Size	50/125
Overall Jacket Material	N/A	Attenuation(MAX)	3.5dB/km @850nm
Nominal Dimension (mm)	0.33 x 3.25mm	Bandwidth (LED)[850/1300nm]	1500/500MHz.km
Weight (lbs/km)	4	Numerical Aperture	0.2
Bend radius(cm) Install/Operate	5/3.25	Link Length@850[1GB/s / 10GB/s]	1,000mtr/300mtr



132 Base Road
Oriskany, NY, 13424
Phone: 315-736-7384
Fax: 315-736-1927
Toll free: 1-888-571-7111
sales@thelightconnection.com
www.thelightconnection.com