


InfiniCor® 300 Ribbon

Description

The Light Connection's ribbon is composed of 12 optical fibers ribbonized with an acetate coating. All component materials meet the EU RoHS and REACH Directive standards.

M62RB12C3

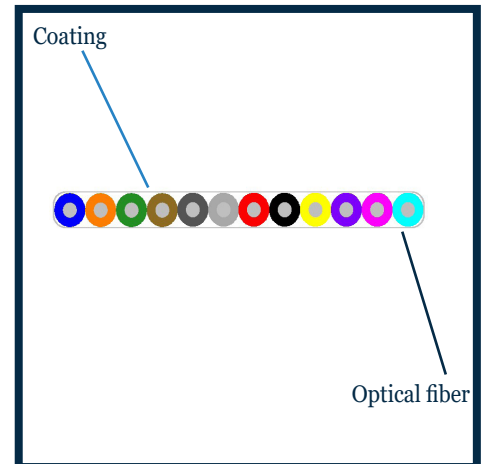

SPECIFICATIONS

Temperature Range

Storage Temperature	-40 C to +70 C
Operating Temperature	-20 C to +70 C

Cable Characteristics

<i>Mechanical</i>		<i>Optical</i>	
Fiber Count	12	Fiber Type	InfiniCor® 300
Strength Member	N/A	Core Size	62.5/125
Overall Jacket Material	N/A	Attenuation(MAX)	3.5dB/km @850nm
Nominal Dimension (mm)	0.33 x 3.25mm	Bandwidth(LED)850/1300nm]	200/500MHz.km
Weight (lbs/km)	4	Numerical Aperture	0.275
Bend radius(cm) Install/Operate	5/3.25	Link Length 1GB/s[850/1300nm]	300mtr/550mtr