




版次 REV	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

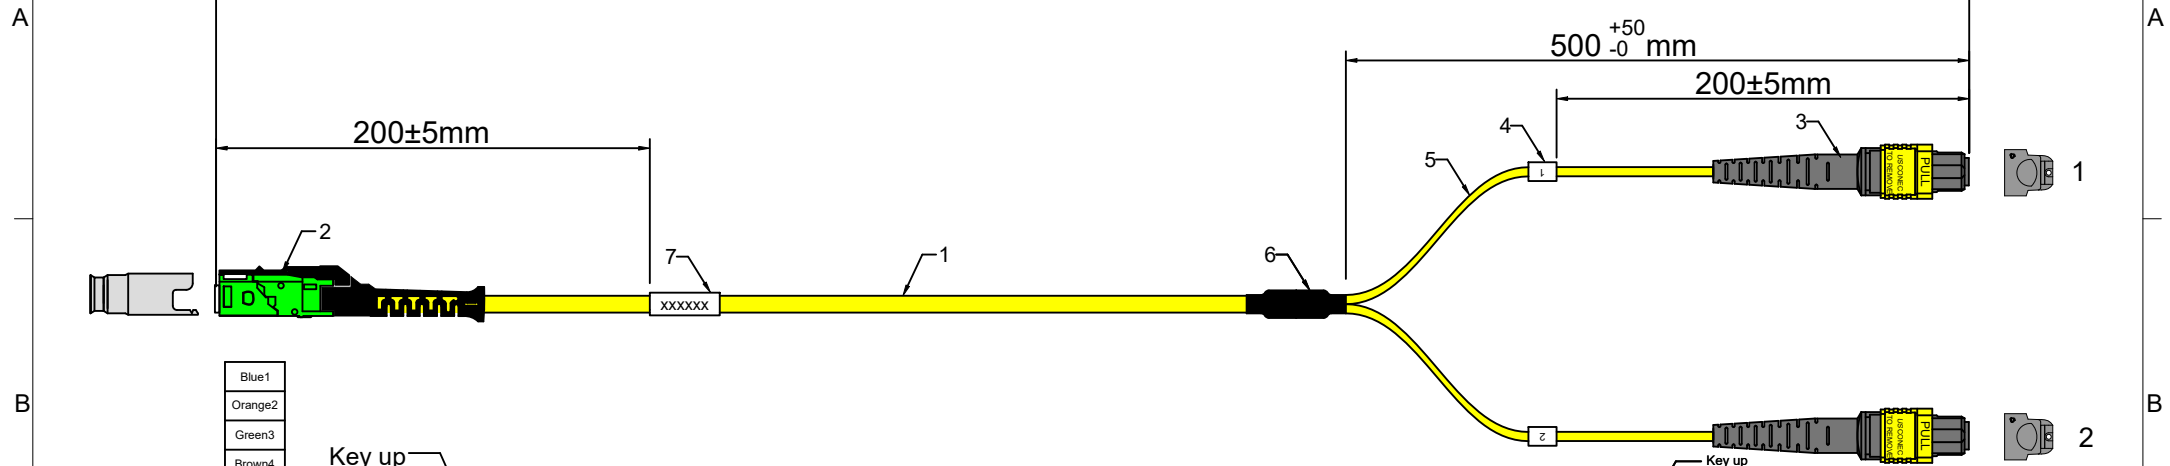


- Blue*1
- Orange*2
- Green*3
- Brown*4
- Grey*5
- White*6
- Red*7
- Black*8
- Yellow*9
- Violet*10
- Pink*11
- Aqua*12
- Blue*13
- Orange*14
- Green*15
- Brown*16



NOTES:
Insertion loss ≤0.35dB
Return loss ≥60dB



Brown*1	Green*2	Orange*3	Blue*4					Brown*9	Green*10	Orange*11	Blue*12
Aqua*1	Pink*2	Violet*3	Yellow*4					Black*9	Red*10	White*11	Grey*12



Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

7	1		Cable Label
6	1		Fanout Kit
5	A/R		OD: 3.0mm,Simplex,OFNP,Yellow tube
4	2		Cable Marker
3	2		MTP/APC Female SM Elite 12Fibers 3.0mm Connector (Yellow Housing Black Boot)
2	1		MMC/APC Female SM Elite 2.3mm 16Fibers Connector(Green Housing Black Boot)
1	A/R		OD:2.3mm, Singlemode , 9/125 G657A2,Corning 16Fiber Micro Cable,OFNP,Color:Yellow

Requirements Of Cable			
Cable Type		Fiber Type	G657A2 Corning
Cable Diameter	2.3mm	Attenuation	@1310nm ≤0.4dB/km
Cable Material	OFNP	Attenuation	@1550nm ≤0.3dB/km
Tensile Strength	Long Term	Crush Resistance	Long Term
	Short Term		Short Term
Bending Radius	Static	Temperature Range	Storage Temperature
	Dynamic		Operating Temperature

ITEM	QTY	P/N	SPECIFICATION								
Cables Plus USA			DRAW	FJZ	DATE	30-10-2024	TITLE: Fiber Optic patch Cord MMC/APC(F)-MTP/APC(F) 16F Singlemode				
Cables Plus USA			CHECK	<i>Wuanhuan</i>	APPROVED	<i>Kaka Tao</i>	CUSTOMER NO	DWG NO	ADT-01-0829-9908-0202	REV	A