




版次 REV	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

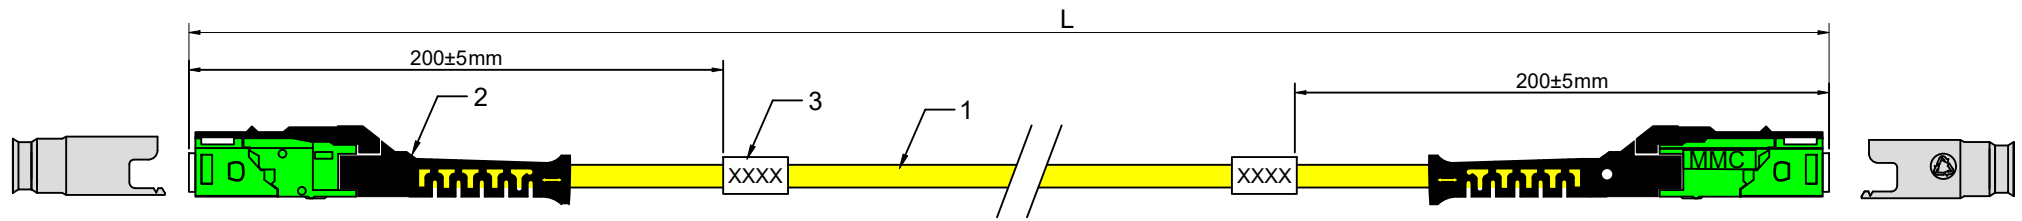


- Blue*1
- Orange*2
- Green*3
- Brown*4
- Grey*5
- White*6
- Red*7
- Black*8
- Yellow*9
- Violet*10
- Pink*11
- Aqua*12
- Blue*13
- Orange*14
- Green*15
- Brown*16



NOTES:
 Insertion loss ≤0.35dB
 Return loss ≥60dB



- Brown*1
- Green*2
- Orange*3
- Blue*4
- Aqua*5
- Pink*6
- Violet*7
- Yellow*8
- Black*9
- Red*10
- White*11
- Grey*12
- Brown*13
- Green*14
- Orange*15
- Blue*16

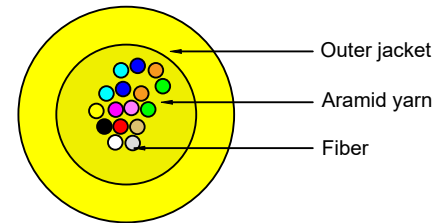

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

Requirements Of Cable					
Cable Type				Fiber Type	G657A2 Corning
Cable Diameter	2.3mm	Attenuation	@1310nm ≤0.4dB/km		
Cable Material	OFNP		@1550nm ≤0.3dB/km		
Tensile Strength	Long Term	40 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	80 N		Short Term	500 N/100mm
Bending Radius	Static	10D	Temperature Range	Storage Temperature	-20°C ~ +70°C
	Dynamic	20D		Operating Temperature	-0°C ~ +60°C

3	2		Cable Label
2	2		MMC/APC Female SM Elite 2.3mm 16Fibers Connector(Green Housing Black Boot)
1	A/R		OD:2.3mm, Singlemode , 9/125 G657A2,Corning 16Fiber Micro Cable,OFNP,Color:Yellow

ITEM	QTY	P/N	SPECIFICATION
------	-----	-----	---------------

Cables Plus USA	DRAW	FJZ	DATE	30-10-2024	TITLE: Fiber Optic patch Cord MMC/APC(F)-MMC/APC(F) 16F Singlemode				
	CHECK	<i>Wuankuan</i>	APPROVED	<i>Kaka Tao</i>	CUSTOMER NO	DWG NO	ADT-01-0829-9999-0201	REV	A