



版次 REV	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE


TYPE A

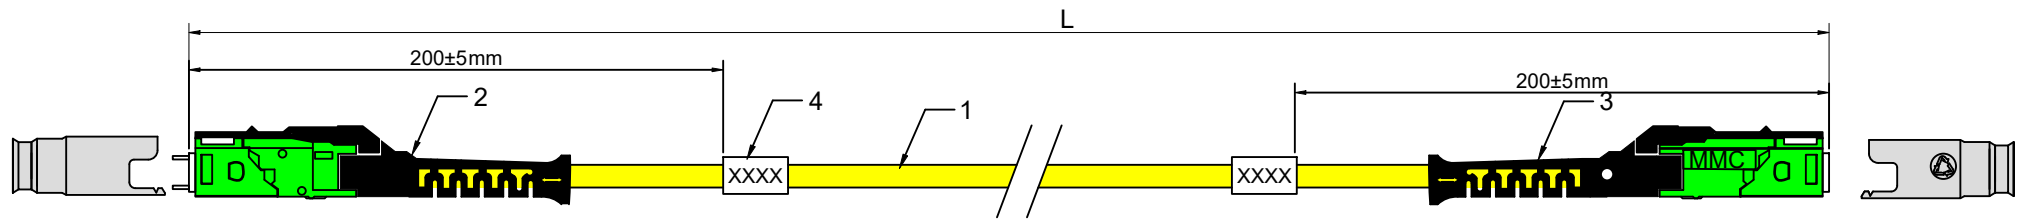


- Blue\*1
- Orange\*2
- Green\*3
- Brown\*4
- Grey\*5
- White\*6
- Red\*7
- Black\*8
- Yellow\*9
- Violet\*10
- Pink\*11
- Aqua\*12
- Blue\*13
- Orange\*14
- Green\*15
- Brown\*16



NOTES:  
Insertion loss ≤0.35dB  
Return loss ≥60dB



- Blue\*1
- Orange\*2
- Green\*3
- Brown\*4
- Grey\*5
- White\*6
- Red\*7
- Black\*8
- Yellow\*9
- Violet\*10
- Pink\*11
- Aqua\*12
- Blue\*13
- Orange\*14
- Green\*15
- Brown\*16

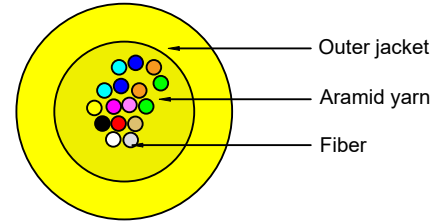

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

Requirements Of Cable					
Cable Type				Fiber Type	G657A2 Corning
Cable Diameter	2.3mm	Attenuation		@1310nm ≤0.4dB/km	
Cable Material	OFNP			@1550nm ≤0.3dB/km	
Tensile Strength	Long Term	40 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	80 N		Short Term	500 N/100mm
Bending Radius	Static	10D	Temperature Range	Storage Temperature	-20°C ~ +70°C
	Dynamic	20D		Operating Temperature	-0°C ~ +60°C

4	2		Cable Label
3	1		MMC/APC Female SM Elite 2.3mm 16Fibers Connector(Green Housing Black Boot)
2	1		MMC/APC Male SM Elite 2.3mm 16Fibers Connector(Green Housing Black Boot)
1	A/R		OD:2.3mm, Singlemode , 9/125 G657A2,Corning 16Fiber Micro Cable,OFNP,Color:Yellow

ITEM	QTY	P/N	SPECIFICATION		
------	-----	-----	---------------	--	--

Cables Plus USA	DRAW	FJZ	DATE	30-10-2024	TITLE: Fiber Optic patch Cord MMC/APC(M)-MMC/APC(F) 16F Singlemode TYPE A				
	CHECK	<i>Wuanshan</i>	APPROVED	<i>Kaka Tao</i>	CUSTOMER NO	DWG NO	ADT-01-0829-9999-0207	REV	A