

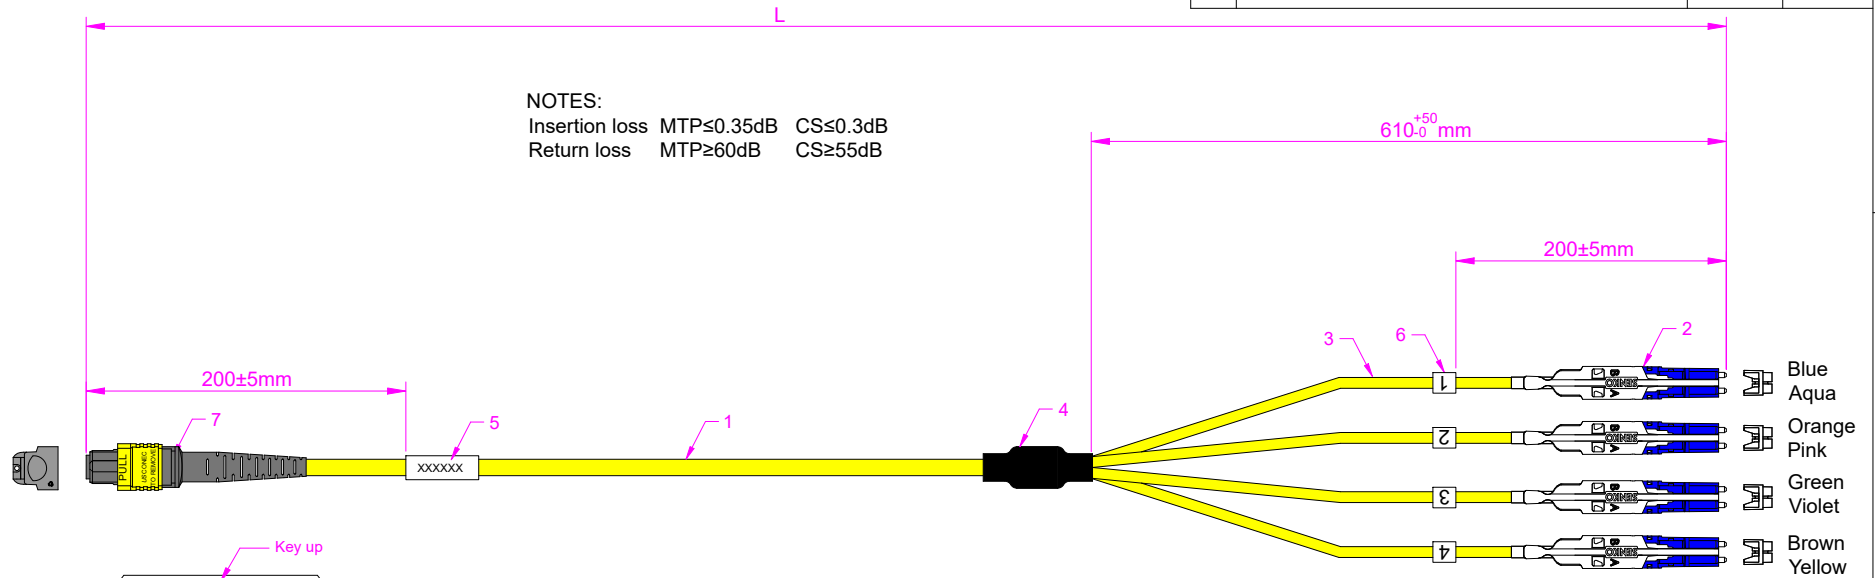


版次 REV	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

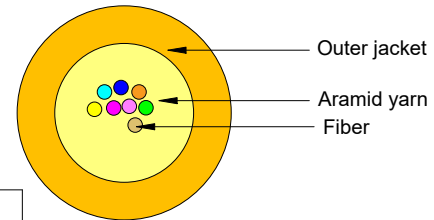

NOTES:
 Insertion loss MTP≤0.35dB CS≤0.3dB
 Return loss MTP≥60dB CS≥55dB



Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

7	1	MTP(Female)/APC SM Elite 12 Fibers 3.0mm Connector (Yellow Housing Black Boot)
6	4	Channel Marker
5	1	Serial Number Label
4	1	Fanout Kit
3	A/R	OD:2.0mm, Simplex, Yellow, OFNP
2	4	CS/UPC SM Pull-tab(Length 47mm) Connector (Blue Housing White Mini Boot)
1	A/R	Ø3.0mm, Singlemode 9/125 G657A1, Corning Fiber, 8 Fibers Micro Cable, OFNP, Color: Yellow

Requirements Of Cable					
Cable Type				Fiber Type	G657A1 Corning
Cable Diameter	3.0mm		Attenuation	@1310nm ≤ 0.33dB/km	
Cable Material	OFNP			@1550nm ≤ 0.2dB/km	
Tensile Strength	Long Term	80 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	160 N		Short Term	500 N/100mm
Bending Radius	Static	10D	Temperature Range	Storage Temperature	-5°C ~ +50°C
	Dynamic	20D		Operating Temperature	-0°C ~ +50°C

ITEM	QTY	P/N	SPECIFICATIONS									
Cables Plus USA			DRAW	YUFENG XIE	DATE	07-04-2023	TITLE: Fiber Optic patch Cord MTP/APC-CS/UPC 8 Fibers Singlemode					
			CHECK	WEN ZHU LUO	APPROVED	Zhenlong Yu	CUSTOMER NO	MTF-CSU-08-OS2-XXXM-B	DWG NO	ADT-01-0829-0811-0061	REV	A