


版次 REV	变更内容 MODIFICATION	变更日期 UPDATE DATE	签名 SIGNATURE

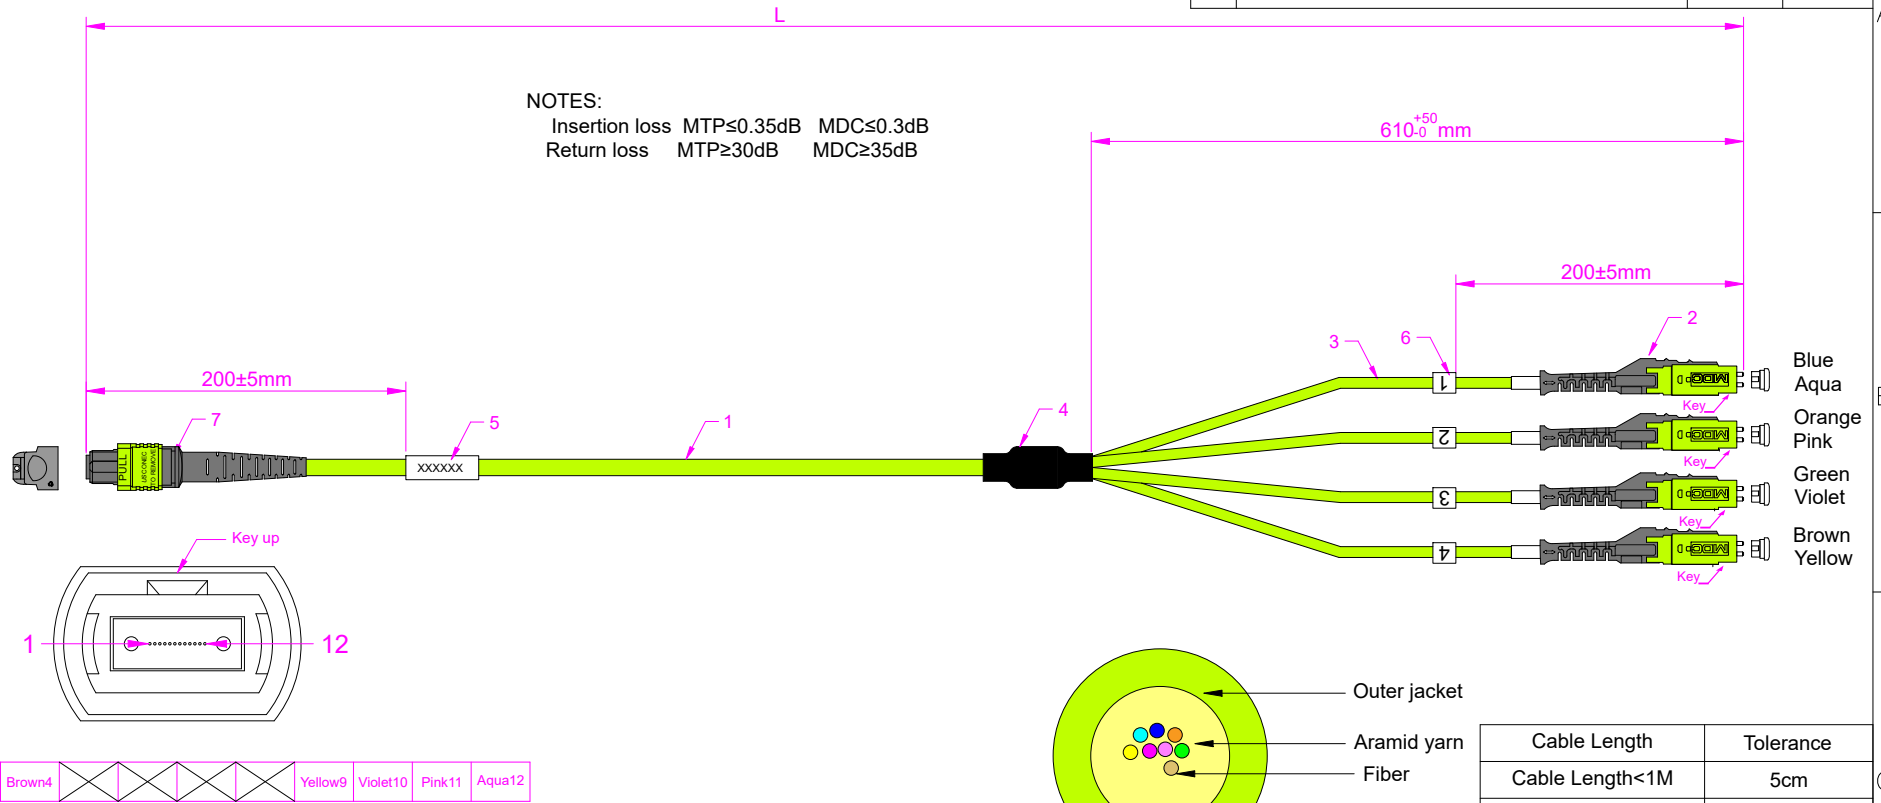

NOTES:
 Insertion loss MTP≤0.35dB MDC≤0.3dB
 Return loss MTP≥30dB MDC≥35dB

Blue1	Orange2	Green3	Brown4	Yellow9	Violet10	Pink11	Aqua12
-------	---------	--------	--------	---------	----------	--------	--------

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

Requirements Of Cable					
Cable Type				Fiber Type	OM5 Corning
Cable Diameter	3.0mm			@850nm ≤2.3dB/km	
Cable Material	OFNP	Attenuation		@1300nm ≤0.6dB/km	
Tensile Strength	Long Term	80 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	160 N		Short Term	500 N/100mm
Bending Radius	Static	10D	Temperature Range	Storage Temperature	-5°C ~ +50°C
	Dynamic	20D		Operating Temperature	-0°C ~ +50°C

7	1		MTP(Female)/PC MM Elite 12 Fibers 3.0mm Connector (Lime Green Housing Black Boot)
6	4		Channel Marker
5	1		Serial Number Label
4	1		Fanout Kit
3	A/R		OD:2.0mm, Simplex,Lime Green,OFNP
2	4		MDC/UPC MM 2.0mm Connector (Lime Green Housing Black Boot)
1	A/R		Ø3.0mm,Multimode 50/125 OM5,Corning Fiber, 8 Fibers Micro Cable,OFNP, Color:Lime Green

ITEM	QTY	P/N	SPECIFICATIONS			
------	-----	-----	----------------	--	--	--

Cables Plus USA	DRAW	YUFENG XIE	DATE	07-04-2023	TITLE: Fiber Optic patch Cord MTP/PC-MDC/UPC 8 Fibers Multimode				
	CHECK	WEN ZHU LUO	APPROVED	Zhenlong Yu	CUSTOMER NO	MTF-MDC-08-OM5-XXXM-B	DWG NO	ADT-01-0829-0813-0077	REV