
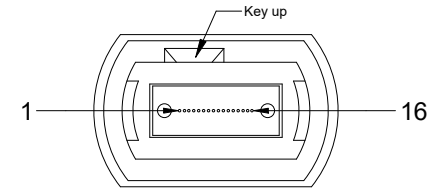
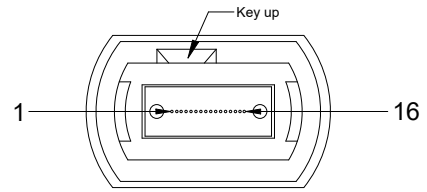


REV	MODIFICATION	UPDATE DATE	SIGNATURE


Type A

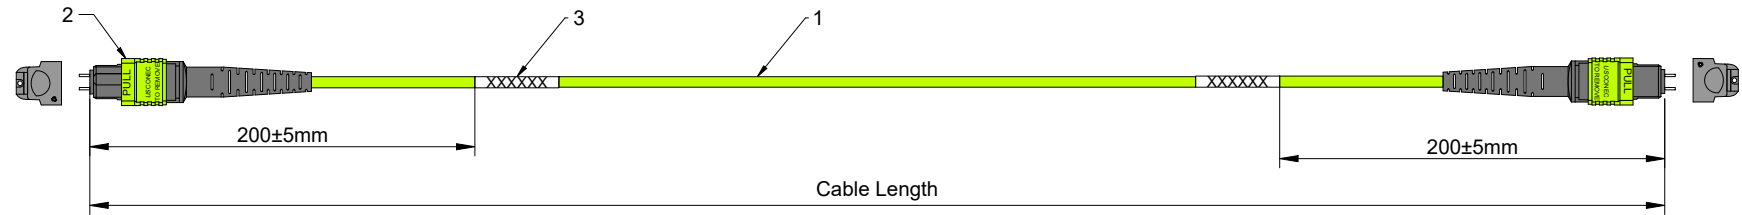

- NOTES:**
1. Insertion loss $\leq 0.35\text{dB}$
 2. Return loss $\geq 30\text{ dB}$
 3. If the length of optical cable is less than 0.5m, only stick a line label in the middle.

Blue1	Orange2	Green3	Brown4	Grey5	White6	Red7	Black8	Yellow9	Violet10	Pink11	Aqua12	Blue13	Orange14	Green15	Brown16
-------	---------	--------	--------	-------	--------	------	--------	---------	----------	--------	--------	--------	----------	---------	---------

Blue1	Orange2	Green3	Brown4	Grey5	White6	Red7	Black8	Yellow9	Violet10	Pink11	Aqua12	Blue13	Orange14	Green15	Brown16
-------	---------	--------	--------	-------	--------	------	--------	---------	----------	--------	--------	--------	----------	---------	---------

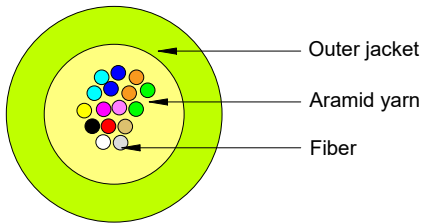

Cable Structure

Cable Length	Tolerance
Cable Length < 1M	5cm
1M ≤ Cable Length < 15M	10cm
15M ≤ Cable Length < 30M	15cm
Cable Length ≥ 30M	Cable Length * 1%

Requirements Of Cable					
Cable Type			Fiber Type		
Cable Diameter			OM5 Corning		
Cable Material			Attenuation		
Tensile Strength			Long Term		
Bending Radius			Short Term		
Static			Storage Temperature		
Dynamic			Operating Temperature		

ITEM	QTY	P/N	SPECIFICATIONS		
3	2		Cable Label		
2	2		MTP/APC Male MM Elite 3.0mm 16 Fibers Usconec Connector(Lime Green Housing Black Boot)		
1	A/R		OD:3.0mm,Multimode 50/125 OM5,Corning Fiber, 16Fibers Micro Cable,OFNP, Color:Lime Green		

Cables Plus USA	DRAW	FJZ	DATE	TITLE: Fiber Optic Patch Cord MTP/APC-MTP/APC 16Fibers Multimode					
	CHECK	<i>Wuankuan</i>	APPROVED	<i>Kaka Tao</i>	CUSTOMER NO	MTM-MTM-16-OM5-xxxMA	DWG NO	ADT-01-0829-0808-0180	REV