


Optical Fiber Pigtail Specification

■Product Information

Product Name: SCAPC-Pigtail


Product Model: 4 to 12F 4 x 8mm-NONTONED Flat Cable Type

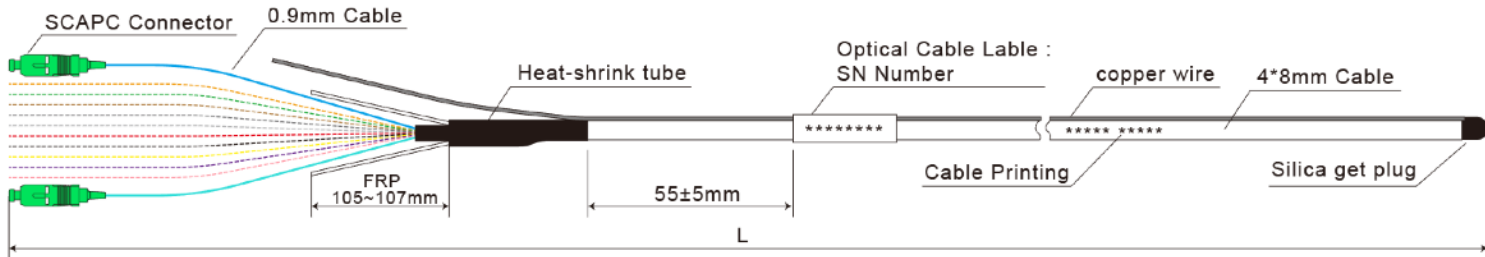

■Product Features

- Low insertion loss
- High return loss
- Excellent endface geometry parameter

■Optical Cable Spec.

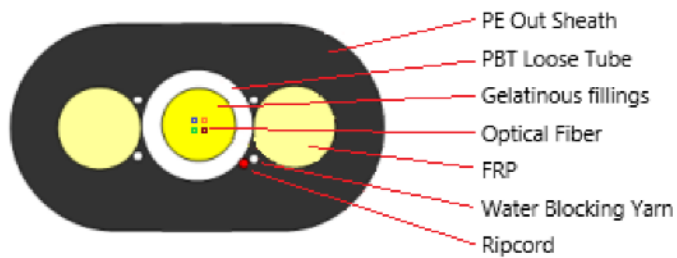

Item		Spec.	Remark
Optical Fiber	Fiber type	G652.D (SMF-28)	
	Color	Blue、Orange、Green、Brown Gray、White、Red、Black、Yellow、 Purple、Pink、Cyan	
	Diameter	250um	
Loose Tube	Material	PBT	
	Color	White	
	Diameter	2.0±0.1mm	
	Oil paste filling	Yes	
Strength Member	Material	FRP	
	Diameter	Φ1.5mm	
Water Blocking Yarn		4*350D	
Ripcord	Spec.	1*1000D	
	Color	Red	
Outer Sheath	Material	HDPE	
	Color	Black	
	Size	(4±0.2) * (8±0.2) mm	

Optical Fiber Pigtail Specification

■Optical Characteristics

Fiber Name	SMF-28e
Fiber Category	G. 652. D
Maximum Attenuation	0.36dB/km@1310nm、0.24dB/km@1550nm
Typical Attenuation	0.25dB/km@1310nm、0.16dB/km@1550nm

■Mechanical Characteristics of Cable

Max. Tensile Strength, Short-Term	1350 N (300 lbf)
Max. Tensile Strength, Long-Term	400 N (90 lbf)
Weight	31.5 ±0.5kg/km
Outer Cable Minimum Bend-Radius Operation	80 mm (3.15 in)
Inner Cable Minimum Bend-Radius Operation	5 mm (0.2 in)
Min. Bend Radius Operation	80 mm (3.15 in)

■Optical cable Printing

Printed with white ink, the font is clear and easy to identify. The printing spacing is 1m, and the error is less than 2mm.

OPTIC FIBER CABLE GYFXBY **F CORNING G652D PE ****M YYYY

■Optical Pigtail Spec.

Project	Spec.	Standard
Operating wavelength	1260~1650nm	Follow GR326-CORE and IEC Standard
Insertion loss	≤0.3dB	
Return loss	≥60dB	
Repeatability	≤0.1dB	
Interchangeability	≤0.1dB	
Durability Test	500 times (ΔIL≤0.2dB)	
Storage temperature	-40~75℃	
Installation temperature	-30~70℃	
Working temperature	-40~75℃	

■Environmental Properties of Pigtail

Project	Test condition	Index	
High temperature	85℃, 96H	Δ IL≤0.2dB	Δ RL≤3dB
Low temperature	-40℃, 96H	Δ IL≤0.2dB	Δ RL≤3dB
Temperature Cycles	-40~+85℃, 500 Cycles	Δ IL≤0.2dB	Δ RL≤3dB
Hot and humid	85℃, 85%RH, 96H	Δ IL≤0.2dB	Δ RL≤3dB



Optical Fiber Pigtail Specification

■Mechanical Properties of Pigtail

Project	Test condition	Index	
Impact	1.5m, 8 times free falls	$\Delta IL \leq 0.2\text{dB}$	$\Delta RL \leq 3\text{dB}$
Vibration	10 to 50HZ, 45 times /min, amplitude 0.75mm, 120 min	$\Delta IL \leq 0.2\text{dB}$	$\Delta RL \leq 3\text{dB}$
Torsion	Distance the connector 20 to 28cm, load 1.35kg, ± 2.5 turns, 9 cycles	$\Delta IL \leq 0.2\text{dB}$	$\Delta RL \leq 3\text{dB}$
Tensile	Distance the connector 20 to 28cm, 0° angle load 4.5 kg, 60s	$\Delta IL \leq 0.2\text{dB}$	$\Delta RL \leq 3\text{dB}$

■Optical Cable Label


PE material label is used to achieve the effect of waterproof, oil proof and not easy to fall off. The product serial number is printed on the label to facilitate product traceability.

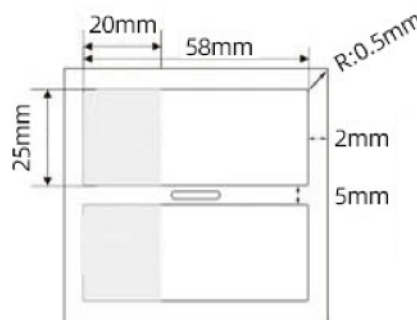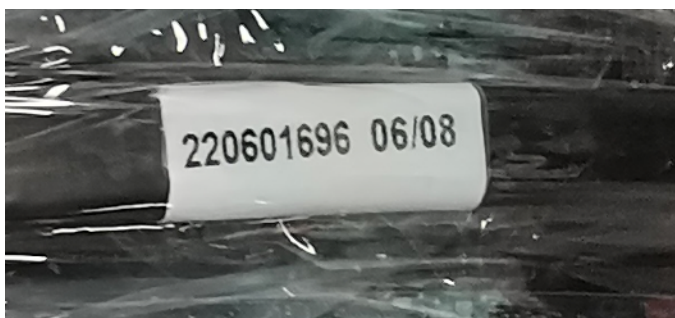

■Packaging

Step 1: The optical cable with the length of less than 150FT is divided into rings; 150FT length and above, use roller to wind optical cable. Optical cables shall be arranged neatly and evenly to ensure smooth pay-off. And the information of the ring roller is as follows:

①Dimensions of ring packing:

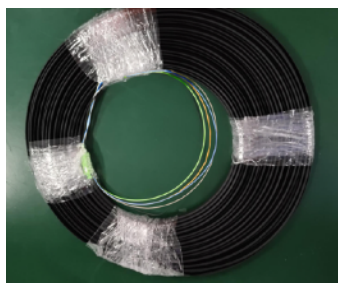


	20M	30-40M
Size (CM)	$\varnothing 30 \times 2.5$	$\varnothing 35 \times 2.5$
N. W (KG)	0.7	1.30
G. W (KG)	0.705	1.305

Optical Fiber Pigtail Specification

②Dimensions of roller packing:

Note:
rollers,



The length of
and other ones



450M and above is made of wooden
are made of plastic rollers.

	46M	60M	80M	90-100M	150M	200M	300M	450M	1000M
Size (CM)	Φ30*7	Φ30*10		Φ30*14	Φ30*17	Φ30*20	Φ30*30.5	Φ35*31.5	Φ50*35
N. W (KG)	1.5	1.95	2.55	3.18	4.75	6.3	9.35	14.05	30.85
G. W (KG)	2.0	2.45	3.15	3.75	5.35	6.95	10.15	15.85	35.5

Step 2: The connector is arranged on the outermost side, and the optical cable is wound with PE film, then stick the product label. The label position is shown in the figure below:



Step 3: The products are packed in outer cartons, and three labels are pasted on the side of the carton, as follows



	20M	40M	46M	60M	80M	100M	150M	200M	300M	450M	1000M
Size (cm)	36*36*44		31*31*29	31*31*31		31*31*29	31*31*35	31*31*21	31*31*31	36*36*32.5	51*51*36

Optical Fiber Pigtail Specification

Q 'ty (pcs)	40	20	4	3		2	2	1	1	1	1
N. W (KG)	28	26	6. 8	5. 85	7. 65	6. 36	9. 5	6. 3	9. 35	14. 05	30. 85
G. W (KG)	29. 5	27. 5	8. 8	7. 94	10. 05	8. 15	11. 35	7. 65	10. 85	16. 85	36. 65