




REV.	REVISION	DATE

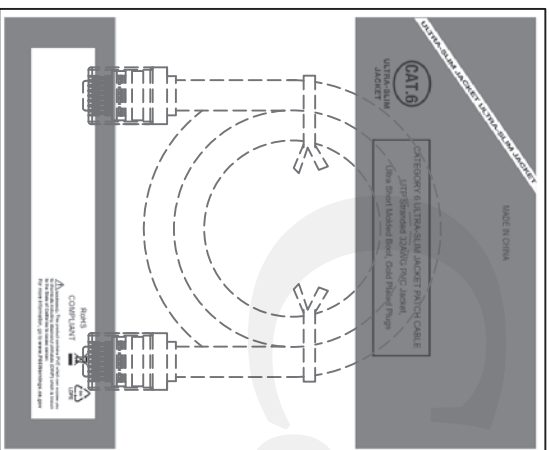

DETAIL A

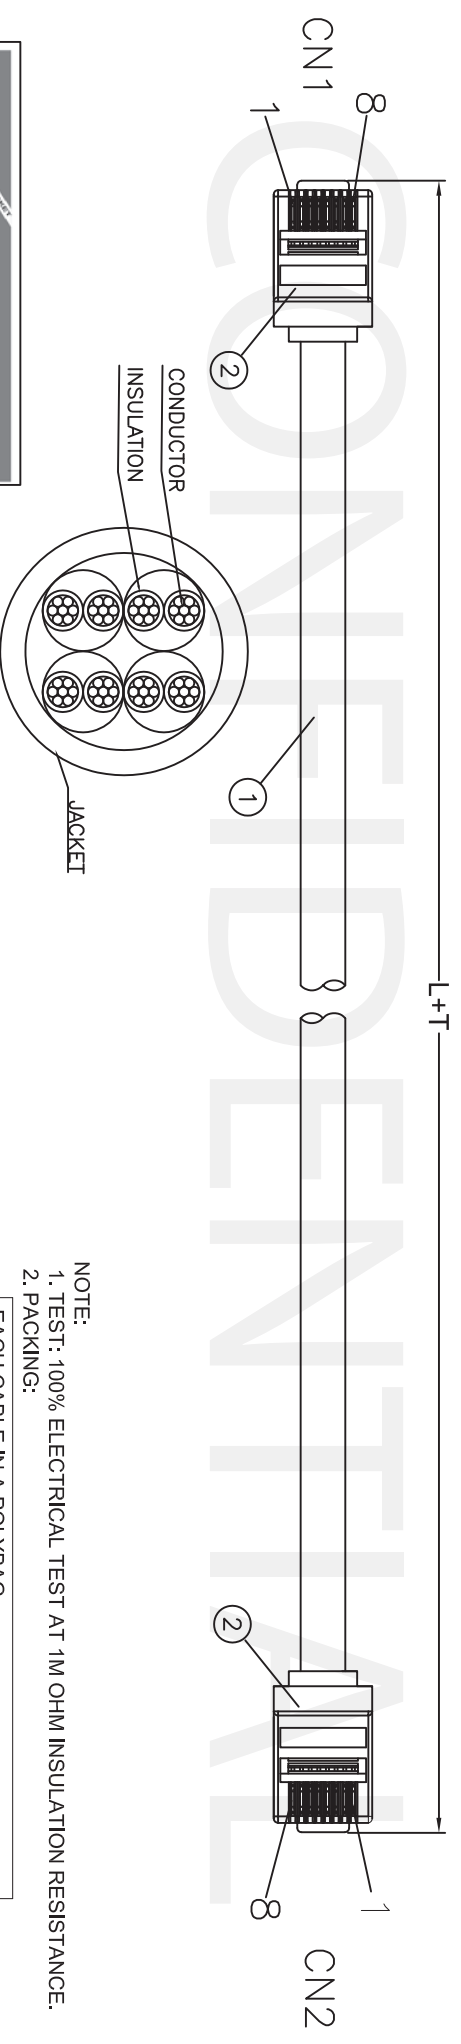

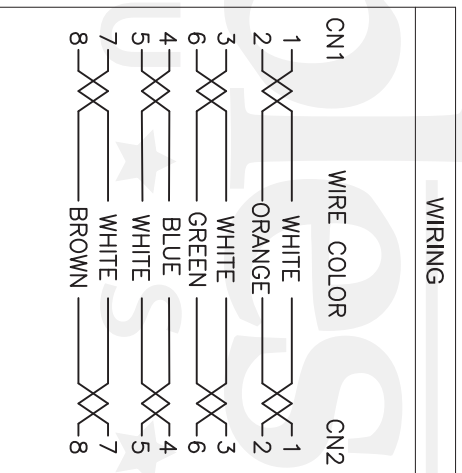

NOTE:  
 1. TEST: 100% ELECTRICAL TEST AT 1M OHM INSULATION RESISTANCE.  
 2. PACKING:

EACH CABLE IN A POLYBAG		
BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE
MEDIUM	POLYBAG	10 CABLES(1'-7')
LARGE	POLYBAG	ALL
EACH LARGE POLYBAG IN AN OUTER CARTON		

CHART:

UL732M807BK-1U	7	7 (2133.6)	+3" / -0(+75/-0)
UL732M806BK-1U	6	6 (1828.8)	+3" / -0 (+75/-0)
UL732M805BK-1U	5	5 (1524)	+2" / -0(+50/-0)
UL732M804BK-1U	4	4 (1219.4)	+2" / -0(+50/-0)
UL732M803BK-1U	3	3 (914.4)	+2" / -0(+50/-0)
UL732M802BK-1U	2	2 (609.4)	+2" / -0(+50/-0)
UL732M801BK-1U	1	1 (304.8)	+2" / -0(+50/-0)

**Cables Plus**  
 U \* S \* A  
 Cables Plus, LLC  
 5608 W Marshall St, Richmond, VA 23230 - (804) 716-9007  
 www.CablesPlusUSA.com

3	8g	PVC-75-xx02	OVER MOLD: PVC 75P, UL94V-O.		UNIT: mm	TITLE: CAT 6 ULTRA SLIM PATCH CORD, 32AWG	SCALE: 	PART NO. UL732M8xyy-zU
2	2PCS	UL170-8S	CONNECTOR: RJ45 (8P8C) CAT.6 PLUG, GOLD PLATED	DRAWN BY Alex M.	DATE 1/20/2023	RJ45-RJ45 BLUE, xx FEET	TOLERANCE: .XX: ±0.01	CUSTOMER
1	1PC	UL732-8xx	CABLE: 32AWGX4P (STRANDED), Cat.6 UTP, PVC JACKET, OD=2.9±0.15mm, UL LISTED (E153116)	CHECKED BY	DATE		.X: ±0.1	DRAWING NO.
ITEM	QTY	PART NO.	DESCRIPTION	APPROVED BY	DATE		X: ±	REV. A
PART LIST								