



P1: C14

P2: C13

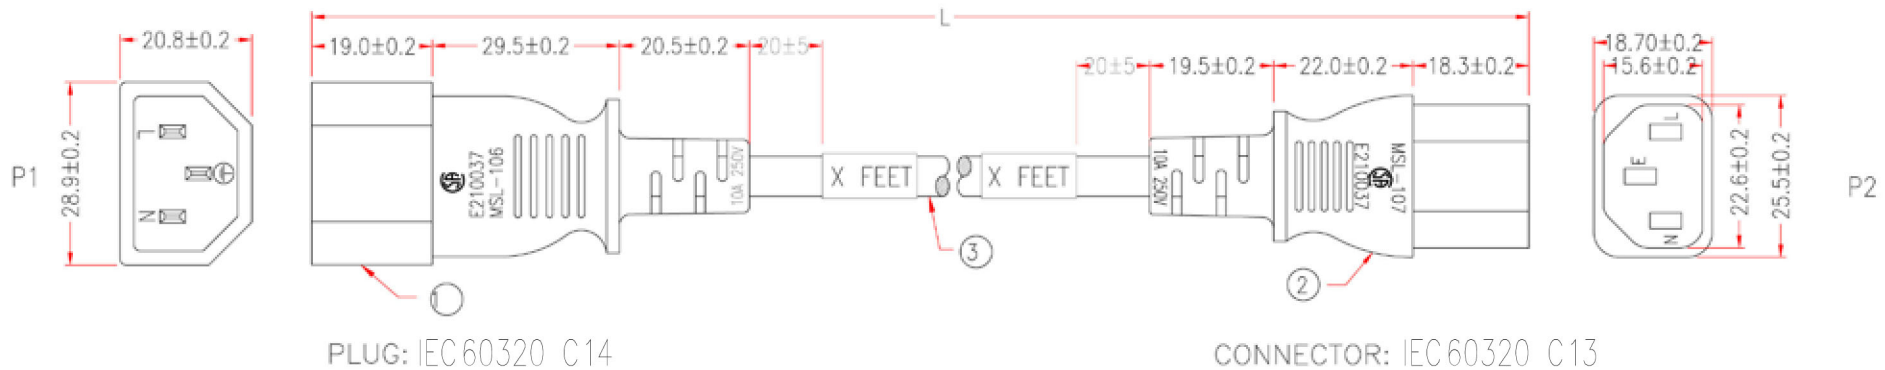


PACKING A: <2FT

PACKING B: >= 2FT



P/N	COLOR
PWR-34VL-12BK-xxxF	BLACK
PWR-34VL-12BL-xxxF	BLUE (PT286C)
PWR-34VL-12GN-xxxF	GREEN (PT376C)
PWR-34VL-12RD-xxxF	RED (PT185C)



CABLE MARKING:

(UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 105°C 300V E204978 CSA  
 SVT 3/C 0.824MM<sup>2</sup>(18AWG) FT2 105°C 300V 204790 MSL

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

P1,P2: E210037

\*NOTE: All relevant materials are complied with RoHS directive .  
The label is waterproof

No.	DESCRIPTION	Q'TY	Supplier
3	UL SVT 18AWG x 3C, OD 6.3mm, JACKET SEE LIST, DRAWING No. EPSVT011803C-017	H5TB11-0304	L-40mm M304
	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304	M304
2	BRACKET: YS-003, COLOR SEE LIST		1 M767
	TERMINAL: 2*4mm 98744BS-0/A	A1QB24-0257	3 M257
1	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304	M304
	BRACKET: YS-014, COLOR SEE LIST		1 M767
	TERMINAL: 2x4mm 98672BS-1	A1QB07-0257	3 M257



DISTRIBUTED BY:  
 Cables Plus, LLC  
 5608 West Marshall Street, Richmond, VA 23230  
 Toll Free: (866) 678-5852 | Fax: (804) 716-9040  
 www.cablesplususa.com

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

APPROVED	P. KIRK	7.22.14		Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	B. KENNISON	7.22.14	DRAWN NAME POWER SUPPLY CORDS & CORDS SETS	
DRAWING	C. HOSKINS	7.22.14	PRODUCT NO. PWR-34VL-12xx-xxxF	
				UNIT: mm