Available from:
CablesPlus U★S★A
Cables Plus, LLC
8504 Glazebrook Ave Richmond, VA 23228 ~ Toll Free (866) 678-5852
www.CablesPlusUSA.com

SLE PROJECTION

USED ON

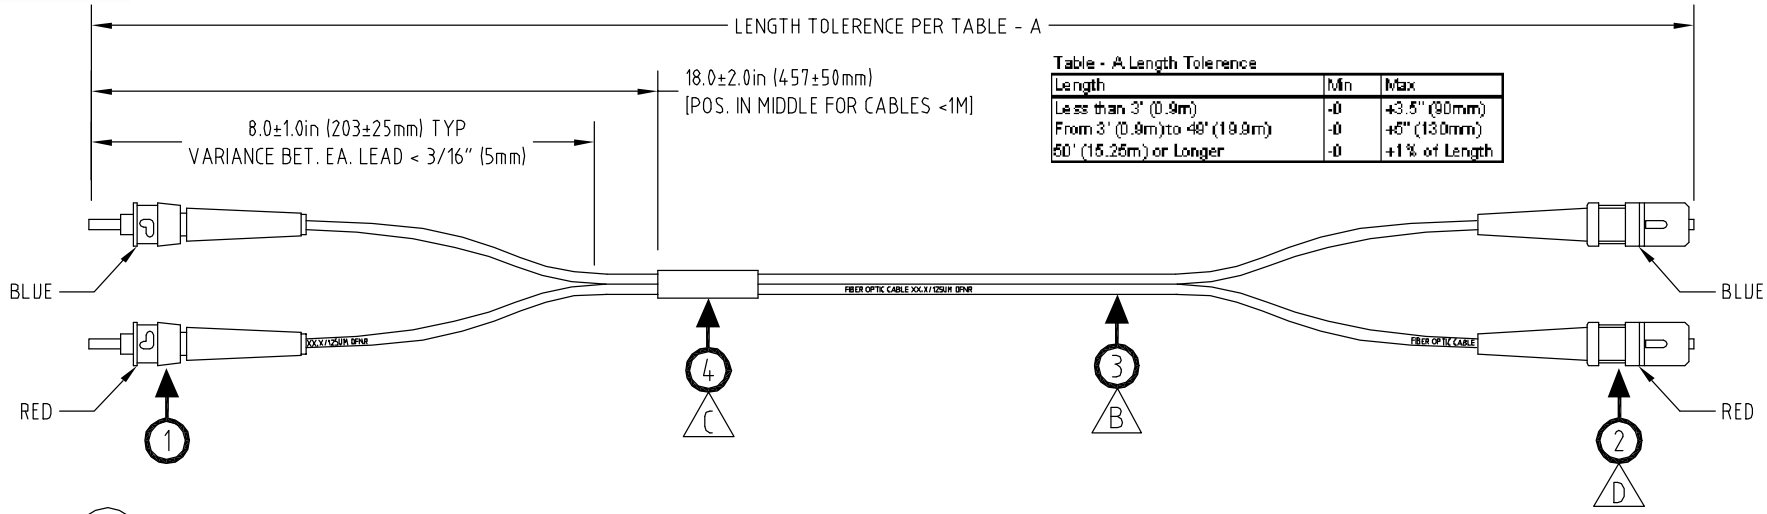

Table - A Length Tolerence

Length	Min	Max
Less than 3' (0.9m)	-0	+3.5" (90mm)
From 3' (0.9m) to 49' (19.9m)	-0	+5" (130mm)
50' (15.25m) or Longer	-0	+1% of Length

6 / 1 ST - SC PATCHCORD
NOT TO SCALE
POLYMER FERRULES

A. ACTUAL ASSEMBLY DETAILS MAY DIFFER SLIGHTLY FROM THE DRAWING REPRESENTATION.

B. EXACT FIBER MARKING AND MARKING ORIENTATION IS SHOWN FOR REFRENCE ONLY AND IS UNSPECIFIED. HOWEVER, FIBER CORE AND UL RATING WILL ALWAYS BE LISTED

C. BARCODE LABEL IS PRINTED WITH FCA SERIAL NUMBER IN I-2of5 FORMAT, AND INCLUDES HUMAN READABLE TEXT.

D. STRAIN RELIEF BOOTS WHICH ARE NOT OVERMOLDED WILL BE ADHERED TO CONNECTOR CRIMP AND FIBER JACKET AND ARE NOT INTENDED TO BE REMOVABLE.

PROJECTION

#	PART NUMBER	QTY	DESCRIPTION	NOTES
4	-	1 ea.	SERIAL NUMBER LABEL	-
3	B22P1	SP	ORANGE, DUPLEX, PVC ZIPCORD, 62.5/125um	-
2	V2J3	2	SC POLYMER OVERMOLDED CONNECTOR	INSTALL SHROUD COLORS AS INDICATED
1	V1J3	2	ST POLYMER OVERMOLDED CONNECTOR	INSTALL COUPLING NUT COLORS AS INDICATED

ORD: -

P	F	LTR	REVISION RECORD	APP	DATE

DIMENSIONS IN: IN
—
DO NOT SCALE PRINT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:
2 PLC DEC ± N/A
3 PLC DEC ± N/A
4 PLC DEC ± N/A
ANGLES ±
SURF TEXTURE: N/A

MATERIAL | HEAT TREAT | FINISH

DR JME 14/12 | APP | CHK | REL

SALES RELEASE SPEC

NAME ST / SC POLY DUPLEX 62.5/125um PATCHCORD

SCALE NONE | PART NO EFSTSCPxxM | SHEET 6 OF 61 | REV A

EF MASTER

Available from:
CablesPlus U★S★A
Cables Plus, LLC
8504 Glazebrook Ave Richmond, VA 23228 ~ Toll Free (866) 678-5852
www.CablesPlusUSA.com