Available from:
Cables Plus U S A
Cables Plus, LLC
8504 Glazebrook Ave Richmond, VA 23228 ~ Toll Free (866) 678-5852
www.CablesPlusUSA.com

USED ON

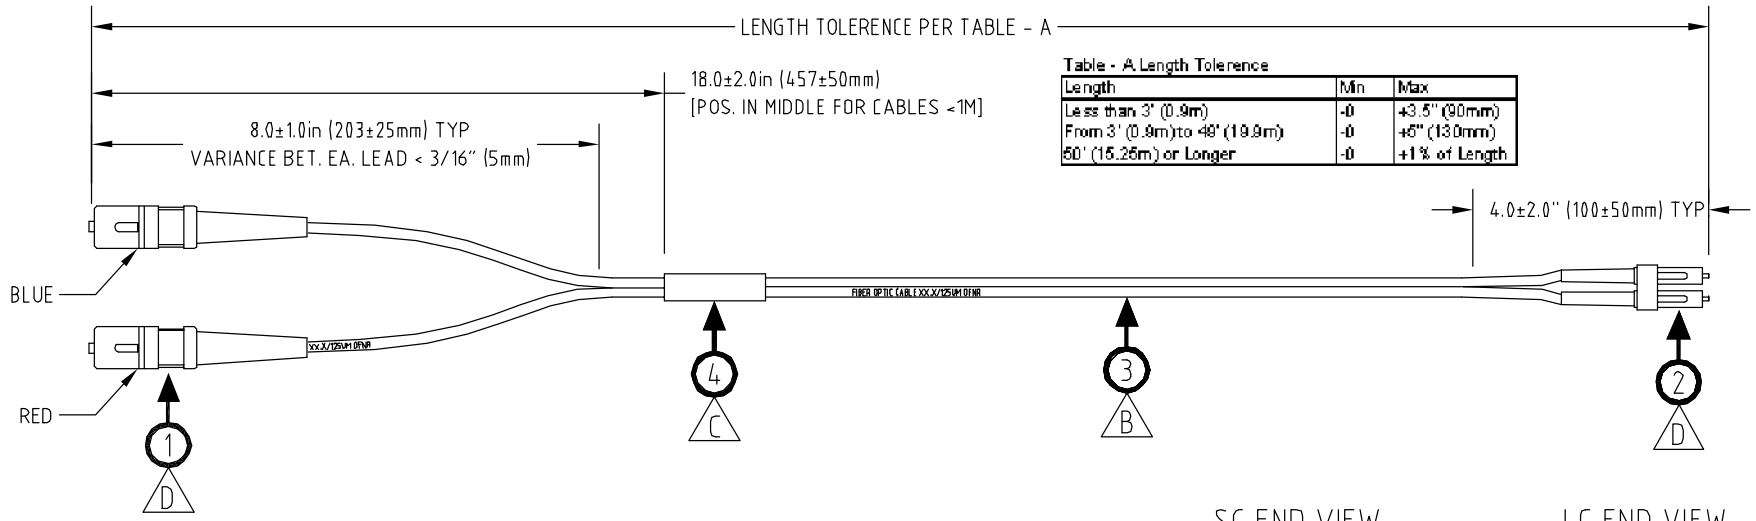

Table - A Length Tolerence

Length	Min	Max
Less than 3' (0.9m)	-0	+3.5" (90mm)
From 3' (0.9m) to 48' (19.9m)	-0	+6" (130mm)
50' (15.25m) or Longer	-0	+1% of Length

16 / 1 LC - SC PATCHCORD
NOT TO SCALE
POLYMER CONNECTORS

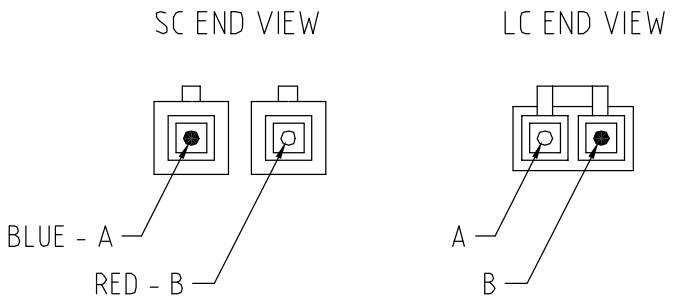

16 / 2 LC - SC POLAIRITY DIAGRAM
STANDARD A - B CONFIGURATION

A ACTUAL ASSEMBLY DETAILS MAY DIFFER SLIGHTLY FROM THE DRAWING REPRESENTATION.

B EXACT FIBER MARKING AND MARKING ORIENTATION IS SHOWN FOR REFRENCE ONLY AND IS UNSPECIFIED. HOWEVER, FIBER CORE AND UL RATING WILL ALWAYS BE LISTED

C BARCODE LABEL IS PRINTED WITH FCA SERIAL NUMBER IN I-2of5 FORMAT, AND INCLUDES HUMAN READABLE TEXT.

D STRAIN RELIEF BOOTS WHICH ARE NOT OVERMOLDED WILL BE ADHERED TO CONNECTOR CRIMP AND FIBER JACKET AND ARE NOT INTENDED TO BE REMOVABLE.

PROJECTION

#	PART NUMBER	QTY	DESCRIPTION	NOTES
4	-	1 ea.	SERIAL NUMBER LABEL	-
3	B22P1	SP	ORANGE, DUPLEX, PVC ZIPCORD, 62.5/125um	-
2	Z6D3	1	LC CERAMIC DUPLEX CONNECTOR	-
1	V2J3	2	SC POLYMER OVERMOLDED CONNECTOR	INSTALL SHROUD COLORS AS INDICATED

ORD: -

P	F	LTR	REVISION RECORD	APP	DATE

DIMENSIONS IN: IN —
DO NOT SCALE PRINT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:
2 PLC DEC ± N/A
3 PLC DEC ± N/A
4 PLC DEC ± N/A
ANGLES ± N/A
SURF TEXTURE: N/A

MATERIAL | HEAT TREAT | FINISH

DR JME 11/12 | APP
CHK | REL
SALES RELEASE SPEC

NAME LC - SC POLY DUPLEX 62.5/125um PATCHCORD
SCALE NONE | PART NO V6C2P2xxM | SHEET 16 of 60 | REV A

EF MASTER

Available from:
Cables Plus U S A
Cables Plus, LLC
8504 Glazebrook Ave Richmond, VA 23228 ~ Toll Free (866) 678-5852
www.CablesPlusUSA.com