



# 3 & 5 CHANNEL SYSTEMS


## GUARD DOG® 3 & 5 CHANNEL PROTECTORS WITH DOG BONE CONNECTORS

The fast and easy way to guard and protect valuable electrical cables and hose lines from damage and abuse while providing a method of safe crossing for vehicle and pedestrian traffic. Each cable/hose line is separated and organized in its own protective channel to ensure safety. Ideal for use in public, commercial and industrial applications where cable protection is required.

| MODEL                 | DESCRIPTION                    | A-LENGTH                         | B-WIDTH                 | C-HEIGHT               | D-CHANNEL WIDTH*       | E-CHANNEL HEIGHT        | WEIGHT                 |
|-----------------------|--------------------------------|----------------------------------|-------------------------|------------------------|------------------------|-------------------------|------------------------|
| GD5X125               | 5-Channel Protector            | 36 in.<br>(914.4 mm)             | 19.75 in.<br>(501.7 mm) | 1.875 in.<br>(47.6 mm) | 1.339 in.<br>(34.0 mm) | 1.325 in.<br>(33.65 mm) | 21.0 lbs.<br>(9.6 kg)  |
| GDEC5X125 (Pair Only) | 5-Ch. End Caps (female) (male) | female 8.75 in.<br>male 5.25 in. | 19.75 in.<br>(501.7 mm) | 1.875 in.<br>(47.6 mm) | 1.339 in.<br>(34.0 mm) | 1.325 in.<br>(33.65 mm) | 6.0 lbs.<br>(2.8 kg)   |
| GDT5X125R             | 45° Right Turn                 | 24.5 in.<br>(622.3 mm)           | 19.75 in.<br>(501.7 mm) | 1.875 in.<br>(47.6 mm) | 1.339 in.<br>(34.0 mm) | 1.325 in.<br>(33.65 mm) | 11.0 lbs.<br>(5.0 kg)  |
| GDT5X125L             | 45° Left Turn                  | 24.5 in.<br>(622.3 mm)           | 19.75 in.<br>(501.7 mm) | 1.875 in.<br>(47.6 mm) | 1.339 in.<br>(34.0 mm) | 1.325 in.<br>(33.65 mm) | 11.0 lbs.<br>(5.0 kg)  |
| GDCR5X125             | 4-Way Cross                    | A = 28.5 in.<br>A2 = 24.5 in.    | 19.75 in.<br>(501.7 mm) | 1.875 in.<br>(47.6 mm) | 1.339 in.<br>(34.0 mm) | 1.325 in.<br>(33.65 mm) | 23.1 lbs.<br>(10.5 kg) |
| GD3X225               | 3-Channel Protector            | 36 in.<br>(914.4 mm)             | 20 in.<br>(510 mm)      | 3 in.<br>(76.5 mm)     | 2.25 in.<br>(58.0 mm)  | 2.25 in.<br>(58.0 mm)   | 30 lbs.<br>(13.6 kg)   |



Protector Color: O/B = Orange Lid with Black Ramps • B/B = Black Lid with Black Ramps • End Cap: Orange

**Dog Bone Connectors compatible with protectors you may already have.**

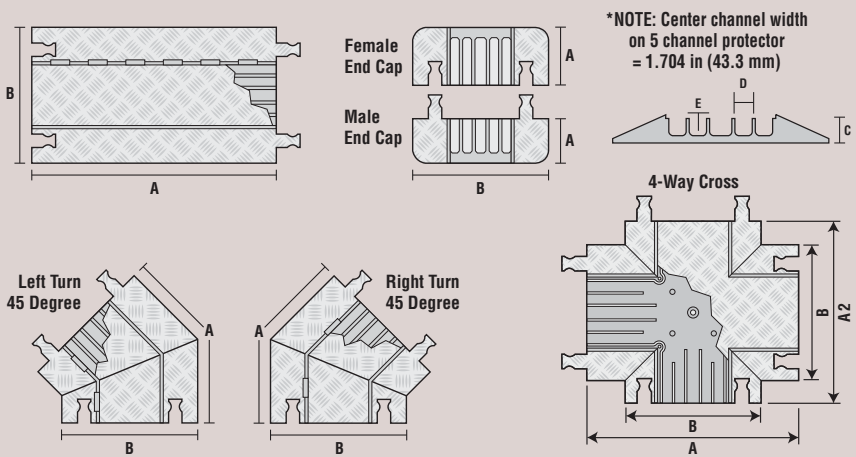


45 degree turns and 4-way cross allow for additional configuration options for 5-channel systems

| SPECIFICATION DATA      |                                | LOAD CAPACITY PER TIRE/AXLE |                              |  | Safety Warning Symbols Molded into Lid |  |  |
|-------------------------|--------------------------------|-----------------------------|------------------------------|--|----------------------------------------|--|--|
| Material.....           | Polyurethane (UV stabilized)   | Channels                    | Max Load 70° F (21° C)       |  |                                        |  |  |
| Operating Temp.....     | -40°F to 120°F (-40°C to 48°C) | 5                           | 10,500 lbs./Tire (4,763 kg)  |  |                                        |  |  |
| Hinge Pin Material..... | Reinforced fiberglass          |                             | 21,000 lbs./Axle (9,526 kg)  |  |                                        |  |  |
| Safety Symbols.....     | Per ANSI Z535.3-1991           | 3                           | 14,210 lbs./Tire (6,446 kg)  |  |                                        |  |  |
|                         |                                |                             | 28,420 lbs./Axle (12,892 kg) |  |                                        |  |  |

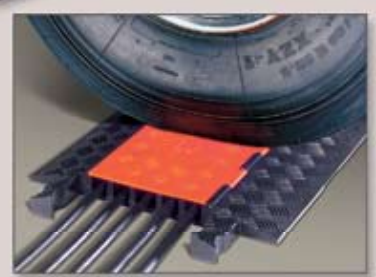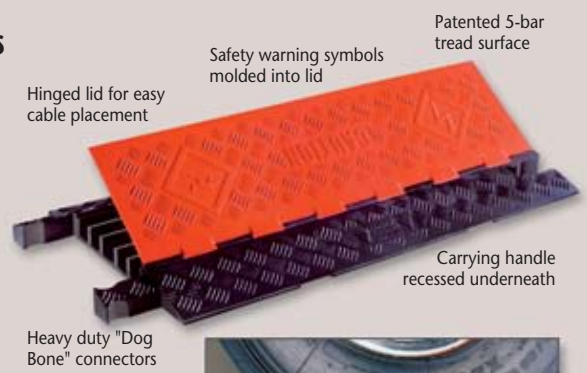

Guard Dog® 5 Channel - protects cable and hose lines up to 1.3 in. outside diameter

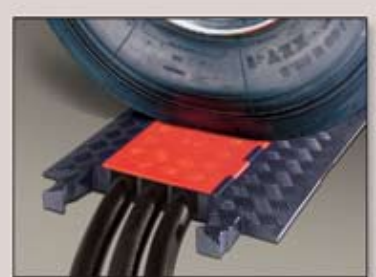

Guard Dog® with ADA Ramps



Guard Dog® provides safety and protection



Guard Dog® with ADA Ramps and Rails