



# GUARD DOG®


DROP OVER PROTECTORS

## GUARD DOG® 3 CHANNEL DROP OVER WITH DOG BONE CONNECTORS

Protect pipes, conduit, cable and hose lines that are mounted to the ground or floor by positioning the Guard Dog® Drop Over over the area to be protected. Drop Overs protect from above but do not prevent abrasion from below. Ideal for providing a safe crossing for vehicles and pedestrian traffic in public, commercial and industrial applications. This 3-Channel Drop Over System features two extra wide channels to accommodate various quantities and sizes of lines.

MODEL	DESCRIPTION	A LENGTH	B WIDTH	C HEIGHT	D-CHANNEL WIDTH	E-CHANNEL HEIGHT	WEIGHT
GD3-DO	3-Channel Drop Over Protector	18 in. (457.2 mm)	19.75 in. (503.6 mm)	1.87 in. (47.6 mm)	D-2: 3.20 in. (81.6 mm) D: 1.65 in. (42.1 mm)	1.56 in. (39.8 mm)	9.7 lbs. (4.41 kg)

Specify Color After Model #: O = Orange; B = Black

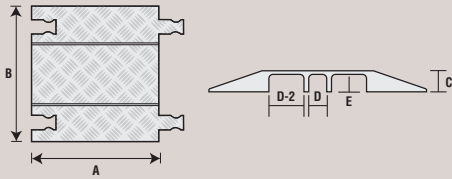

Guard Dog Drop Overs interconnect with Guard Dog 5 Channel protectors and accessories and are also compatible with Cross Guard ADA Ramps (see page 15).


SPECIFICATION DATA		LOAD CAPACITY PER TIRE/AXLE			
Material.....	Polyurethane (UV stabilized)	Channels	Max Load 70° F (21° C)		
Operating Temp.....	-40°F to 120°F (-40°C to 48°C)	3	10,500 lbs./Tire (4,763 kg)		
Safety Symbols.....	Per ANSI. Z535.3-1991		21,000 lbs./Axle (9,526 kg)		

**NOTE:** Drop over protectors do not prevent abrasion to cable from below.

## DROP OVER PROTECTORS

Safety warning symbols molded into protector

Patented 5-bar tread surface

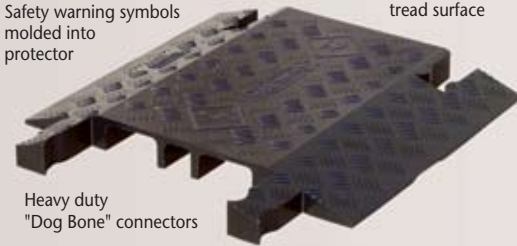

Heavy duty "Dog Bone" connectors



Connect alternating colors to enhance visual warning




Guard Dog® Drop Over - protects pipe, cable and hose lines up to 1.56 in. outside diameter

# FASTLANE™

DROP OVER CABLE PROTECTORS

## DROP OVER PROTECTORS

### TWO SIZES AVAILABLE

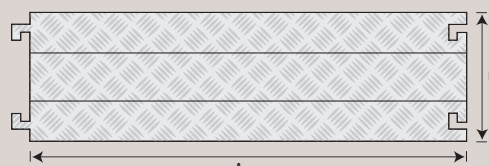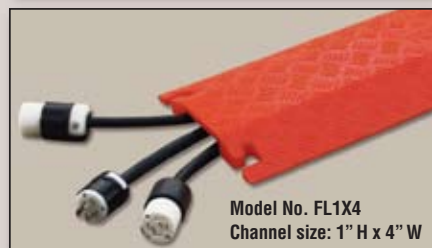

### THE EASY AND FAST WAY TO PROTECT SMALL CABLES AND CORDS AT HOME OR IN COMMERCIAL AND INDUSTRIAL ENVIRONMENTS.

FastLane™ Drop Over Protectors are made from durable polyurethane and feature heavy duty "L" shape connectors for easily attaching additional protectors as required. Patented 5-bar tread plate surface provides maximum traction for pedestrian traffic. These low profile protectors are compact for easy set-up, take-down and storage.

Connect alternating colors to enhance visual warning

- Modular design for easy set-up, breakdown & storage
- Patented 5-bar tread plate surface provides maximum traction
- Molded in safety warning symbols
- Heavy duty "L" shaped connectors
- Universal safety colors

MODEL NUMBER	DESCRIPTION	A LENGTH	B WIDTH	C HEIGHT	D CHANNEL WIDTH	E CHANNEL HEIGHT	WEIGHT
FL1X1.5	Drop Over Protector	36 in. (914.4 mm)	5.25 in. (133.3 mm)	.75 in. (19 mm)	1.5 in. (39 mm)	.5 in. (12.7 mm)	3 lbs. (1.4 kg)
FL1X4	Drop Over Protector	36 in. (914.4 mm)	10.75 in. (273 mm)	1.5 in. (38.1 mm)	4 in. (101.6 mm)	1 in. (25.4 mm)	8 lbs. (3.6 kg)

\* Specify Color after Model #: O = Orange; B = Black

SPECIFICATION DATA			
Material.....	Polyurethane (UV stabilized)		
Operating Temp.....	-40°F to 120°F (-40°C to 48°C)		
Safety Symbols.....	Per ANSI. Z535.3-1991		

**NOTE:** Drop over protectors do not prevent abrasion to cable from below.